

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number  
**WO 2004/082372 A1**

(51) International Patent Classification<sup>7</sup>: A01K 27/00, 1/04

(21) International Application Number:  
PCT/IT2003/000229

(22) International Filing Date: 11 April 2003 (11.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PR2003A000019 19 March 2003 (19.03.2003) IT

(71) Applicant (for all designated States except US): BICE  
S.R.L. [IT/IT]; Via Martiri di Minozzo, 12, I-42100 Reggio Emilia (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): CALVI, Cesare  
[IT/IT]; Via de Chirico, 17, I-43100 Parma (IT).

(74) Agent: GOTRA, Stefano; Bugnion S.P.A, Via Garibaldi,  
22, I-43100 Parma (IT).

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP,

[Continued on next page]

(54) Title: LEASH FOR ANIMALS, APPLICABLE TO A VEHICLE

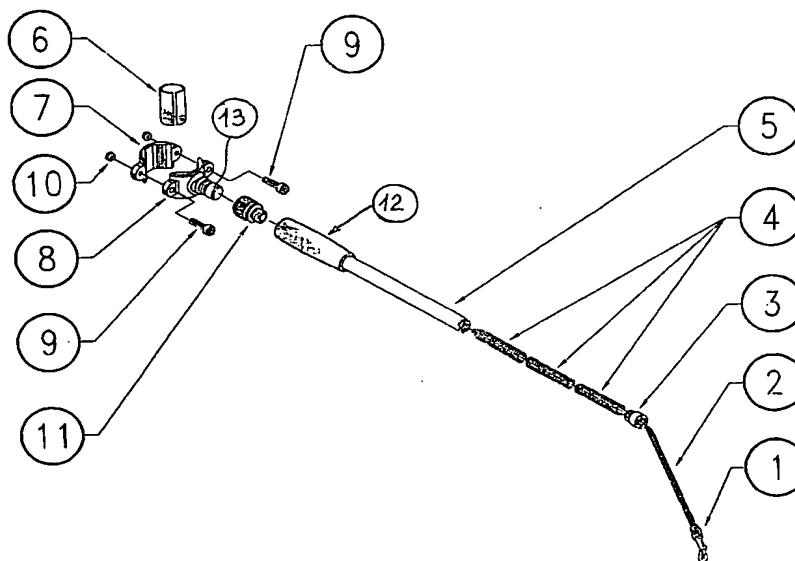

(57) Abstract: A leash for animals applicable to a vehicle comprises a bar (5), means for fastening the bar to the frame of the vehicle, a rope (2) associated to the bar and provided with means for fastening to the collar of the animal, and it is characterised in that the bar (5) is internally hollow and houses one or more springs (4) operating in compression when the animal stresses the rope (2). The means for fastening the bar to the frame of the vehicle comprise : First fastening means (6, 7, 8, 9, 10, 13) anchored to the frame of the vehicle ; second fastening means (11) associated to the bar and so shaped as to be fastened and/or released rapidly by simple coupling/uncoupling to the first fastening means.

WO 2004/082372 A1



KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for the following designation US
- of inventorship (Rule 4.17(iv)) for US only

**Published:**

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## LEASH FOR ANIMALS, APPLICABLE TO A VEHICLE

The present invention relates to a leash for animals able to be applied to a vehicle, and in particular it refers to the case of a dog leash able to be applied to a vehicle with two or three wheels, with or without engine propulsion, such as bicycles, tricycles, mopeds, sleds.

US 4854269 teaches a retention device that is fastened to the frame of a bicycle to keep a dog at the leash, while keeping both hands on the handlebar. The device comprises a bracket that is fastened to an upright of the frame, a first bar that extends laterally to the bicycle and is secured to the bracket, a second bar elastically connected to the first by means of a helical spring working in traction, a cable connected to the end of the second bar opposite to the spring, a pair of notched rings which, by opening, release the dog from the retention device, if the dog stresses the bicycle frame with excessive force.

US 4134364 discloses a device constituted by a single bar fastened to the bicycle frame.

The bar is provided with a flexible pivot pin whereto is anchored a small chain in such a way that said pivot pin constitutes an automatic release means in case of excessive stress exerted by the dog.

CA 2151542 teaches a device constituted by a bar connected to a bicycle frame by means of a rotating joint, in correspondence with the axle of the rear wheel. The joint allows the bar to oscillate in the vertical and horizontal direction according to the dog's movements. The bar has in its interior a helical spring that operates in traction and is connected to a rope that terminates with a spring catch for connecting a collar.

DK 9600464 discloses a device constituted by a bar fastened to the frame of a bicycle and provided with a spring that works in traction and is connected to a small chain.

All the aforementioned documents illustrate devices wherein the bar or bars fastened to

the bicycle frame can be removed with difficulty therefrom, by unscrewing the anchoring bracket or unscrewing the bar, or removing the locking means with difficulty.

An additional drawback of the prior art is that it provides for the use of a single spring operating in traction, which is thus prone to weakening.

5 A further drawback is the impossibility of adequately adjusting the height of the device to the height of the dog, also taking into account its mass.

Another drawback is given by the fact that, when the dog's owner stops, gets off the bicycle and wishes to walk with his/her dog, (s)he needs to have a leash to attach to the dog collar.

10 An aim of the present invention is to eliminate the aforesaid drawbacks and to make available a leash which can be applied to a bicycle in easily removable fashion.

An additional aim is to make said leash suitable to dogs or animals of different sizes, within the scope of a simple and economical solution.

Said aims are fully achieved by the leash of the present invention, which is characterised  
15 by the contents of the claims set out below and in particular in that it comprises a bar, anchored to the vehicle and internally hollow, which houses one or more springs operating in compression when the animal stresses a rope connected to the bar.

The means for securing the bar to the frame of the vehicle preferably comprise a pair of semi-cylindrical jaws that encompass the frame and are fastened thereto by means of bolts  
20 or lever systems (for instance those already in use in bicycles), in which one of the two jaws has a protuberance so shaped as to be anchored in a corresponding cavity of a rapid snap-on coupling of the female type, screwed to an end of the bar.

The bar, in correspondence with the vehicle-side end can be provided with a grip or handle for use as a normal leash once the bar is detached from the vehicle.

25 This and other characteristics shall become more readily apparent from the description

that follows of a preferred embodiment shown, purely by way of non limiting example, in the accompanying drawing tables in which:

- Figure 1 shows an exploded view of the leash and the means to associate it to a vehicle and to a collar of an animal;

5       - Figures 2 and 3 schematically show the application of the leash on a vehicle, in this specific case a bicycle.

With reference to the figures, the number 1 designates a hook, of the type commonly called "spring catch", able to be anchored to the collar, not shown herein, of an animal, typically a dog.

10       The spring catch 1 constitutes means for latching onto the collar of an animal.

A string 2 or rope, which may be elastic, is inserted in an eyelet of the hook and then traverses, substantially in bifilar form, a closure ogive or cap 3 and three springs 4 to be closed in a terminal knot downstream of said three springs, which are housed inside a hollow bar 5.

15       The bar 5 is coated with a grip or handle 12 in correspondence with an end in which a female snap-on rapid coupling 11 is screwed, destined to interact with a corresponding protuberance 13 exhibited by a front jaw 8.

The front jaw 8 and a rear jaw 7, substantially with semi-cylindrical shape, encompass, preferably with the interposition of a sheath 6, around the frame of a bicycle (Figures 2 and 3) or of another vehicle such as a tricycle or a moped, typically in the area underlying the seat, and are fastened to the frame itself by means of bolts constituted by screws 9 and nuts 10, or are fastened to the frame by means of lever systems of the type already commonly used in bicycles.

20       The jaws with the sheath and the bolts are first securing means permanently fastened to the frame of the vehicle, although it is possible to disassemble them acting on the bolts.

Said first securing means interact with second securing means associated with the bar and constituted by the quick coupling fitting 11, in order globally to constitute means for securing the bar to the frame in easily removable fashion.

The type of securing is particularly rapid and effective and uses a hollow quick coupling fitting 11 and a protuberance 13 which are substantially similar to the couplings used in the field of garden and lawn irrigation to connect the spraying hoses to taps or to other tools.

The grip 12 serves as a handle for the operator to use the bar as a normal leash once it is detached from the vehicle.

The bar contains within it three springs 4, but there could also be one spring or in any case a number other than three, which can easily be replaced simply by unscrewing the ogive 3 and untying the terminal knot of the rope. The replacement of the springs can serve to adapt the leash to dogs or animals of different size, hence destined to the stress the vehicle with more or less intense force.

The end of the spring closest to the frame of the vehicle is tapered, i.e. it has a conicity, clearly shown in the figure, to allow a simple terminal knot to prevent the rope from returning in the spring. Essentially, the exit hole of said spring will be only slightly larger than the diameter of the spring or of the springs that traverse it.

The fact that the rope passes through the eyelet of the hook 1 and returns in bifilar form through the springs enables a single node to be able to fasten the rope, but according to a different embodiment, not shown herein, the springs may be traversed by a single cable, knotted at the exit from the springs and also knotted to the eyelet of the hook.

Unlike the prior art, the present invention allows a rapid fastening and unfastening by coupling/uncoupling the bar to the frame of the bicycle and it also allows to use the bar, once it is detached from the frame, as a normal leash without the user's having to bring

with him/her an additional leash when (s)he wishes to walk with his/her dog.

The fact that the springs work in compression assures their duration, and it provides a physical limit to the possible travel of the spring 2 as a consequence of the stresses imparted by the dog, both when the leash is held by the user's hand and when the leash  
5 is anchored to the vehicle.

The present invention also allows to use the same bar on different bicycle (for instance owned by the same family), previously provided with the fastening jaw alone and for this reason the bar with the rope may be sold separately from the means for fastening to the vehicle.

10 As shown in Figures 2 and 3, the leash is positioned projecting laterally from the vehicle, in the specific case a bicycle, and the bar takes on a configuration that is substantially horizontal or inclined downwards by  $0^\circ - 30^\circ$ , (Figure 2) and substantially orthogonal to the longitudinal axis of the vehicle or slightly inclined backwards (Figure 3) by about  $0^\circ - 35^\circ$ .

## CLAIMS

1. Leash for animals applicable to a vehicle, in particular leash for dogs applicable to bicycles, tricycles or mopeds, of the type comprising a bar (5), means for fastening the bar to the frame of the vehicle, a rope (2) associated to the bar and provided with means for fastening to the collar of the animal,

5 characterised in that the bar (5) is internally hollow and houses one or more springs (4) operating in compression when the animal stresses the rope (2).

2. Leash as claimed in claim 1, wherein the means for fastening the bar to the frame of the vehicle comprises:

first fastening means (6, 7, 8, 9, 10, 13) anchored to the frame of vehicle;

10 second fastening means (11) associated to the bar and so shaped as to be fastened and/or released rapidly by simple coupling/uncoupling to the first fastening means.

3. Leash as claimed in claim 2, wherein the first fastening means comprise a pair of semi-cylindrical jaws (7, 8) which encompass a frame and are fastened thereto by means of bolts (9, 10), wherein one of the two jaws (8) has a protuberance (13) so shaped as to be anchored in a corresponding hollow of the second fastening means (11).

4. Leash as claimed in claim 2, wherein the second fastening means comprise a female snap-on rapid coupling (11), screwed on an end of the bar (5), and able to be coupled with a protuberance (13) exhibited by the first fastening means.

5. Leash as claimed in claim 1, wherein the bar (5), in correspondence with the ends on the side of the means for fastening to the frame of the vehicle, is provided with a grip or handle (12) for use as a normal leash once the bar (5) is detached from the vehicle.

6. Leash as claimed in claim 1, wherein are present three springs (4) in series easily replaceable by simple removal of a closure ogive or cap (3) of the bar and untying a terminal knot of the rope.



7. Leash as claimed in claim 1, wherein the spring (2) is constituted by a cable that passes through an eyelet comprised in the means for fastening to the collar of the animal, traverses the spring or the springs (4) contained in the bar (5) and is knotted at the exit from the tapered end of the single spring or of the spring that is closest to the frame of the vehicle.

8. Leash for animals applicable to a vehicle, in particular leash for dogs applicable to bicycles, tricycles or mopeds, of the type already provided with fastening means for the leash, characterised in that it comprises an internally hollow bar (5) which is so shaped as to be able to be anchored to the fastening means and houses one or more springs (4) operating in compression when the animal stresses a rope (2) associated to the bar and provided with means for coupling the rope to a collar of the animal.

9. Leash as claimed in claim 1, wherein the leash is arranged projecting laterally from the vehicle and the bar assumes a substantially horizontal configuration or one that is inclined downwards by  $0^{\circ}$  -  $30^{\circ}$ , and substantially orthogonal to the longitudinal axis of the vehicle or slightly inclined backwards by about  $0^{\circ}$  -  $35^{\circ}$ .

10. Vehicle, characterised in that it comprises a leash as claimed in any of the previous claims.

1/3

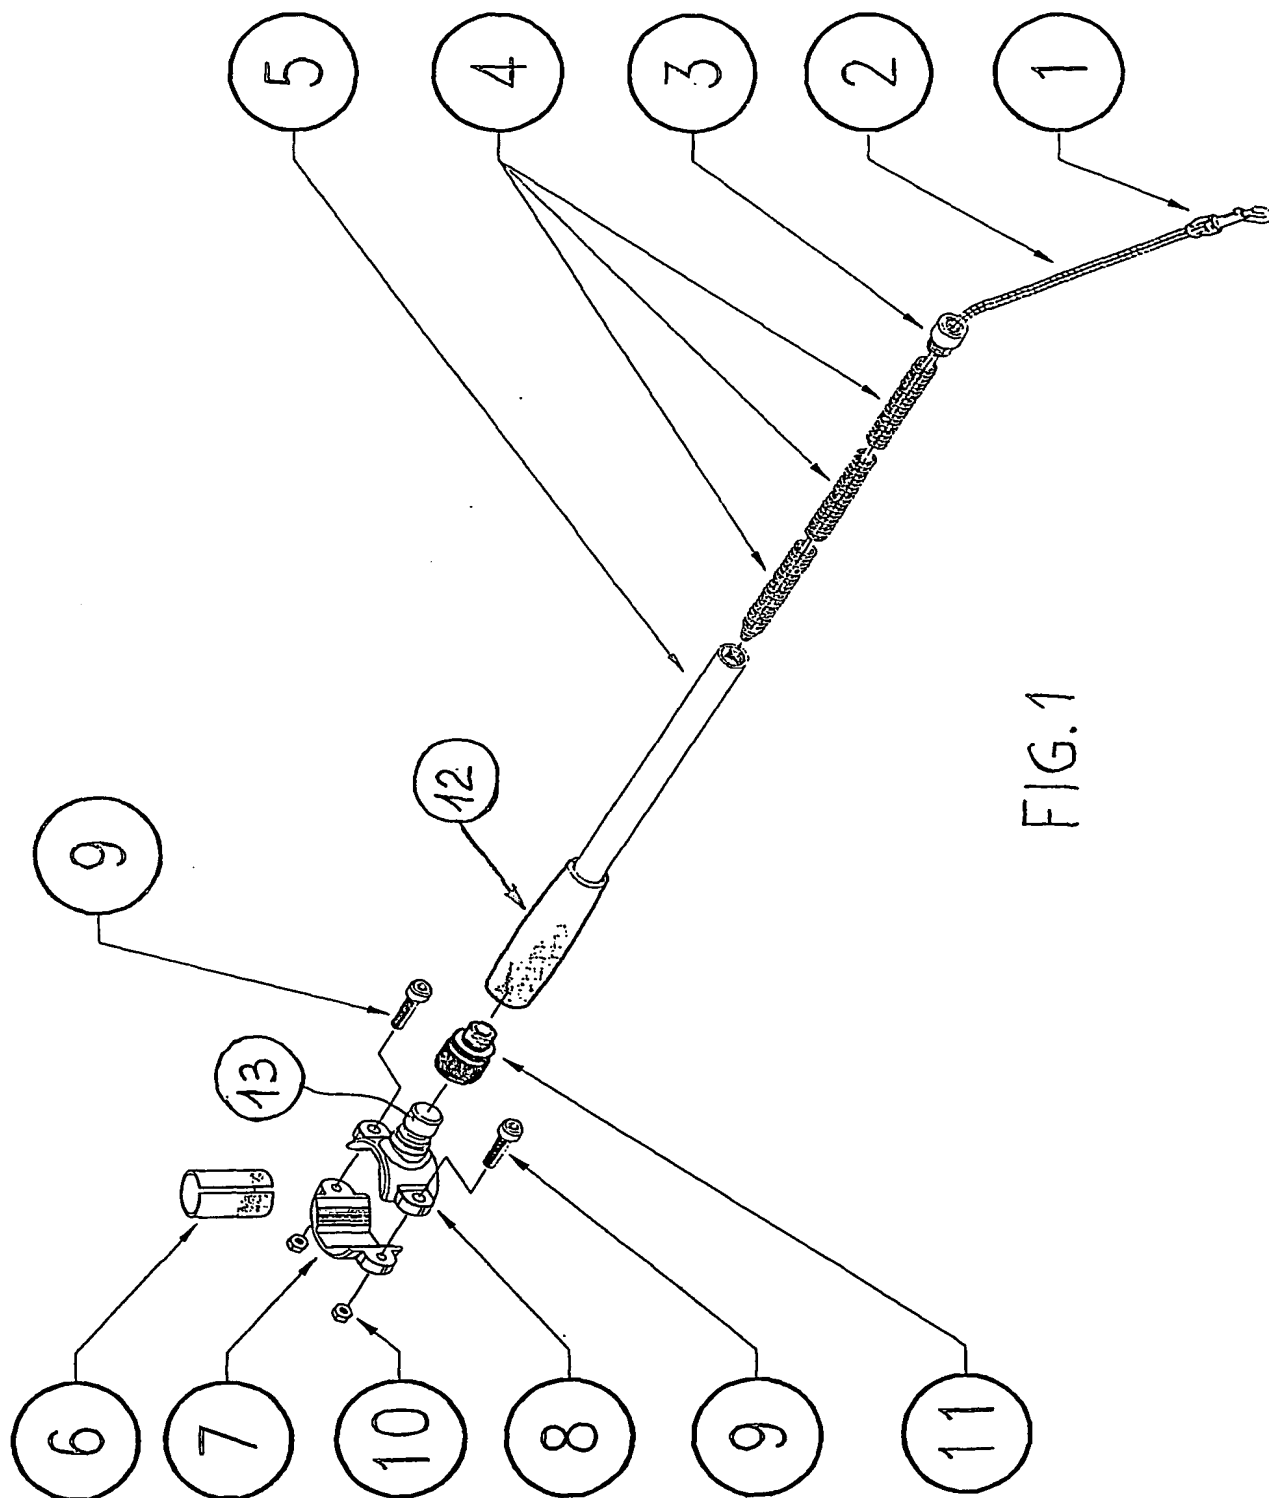


FIG. 1

2/3

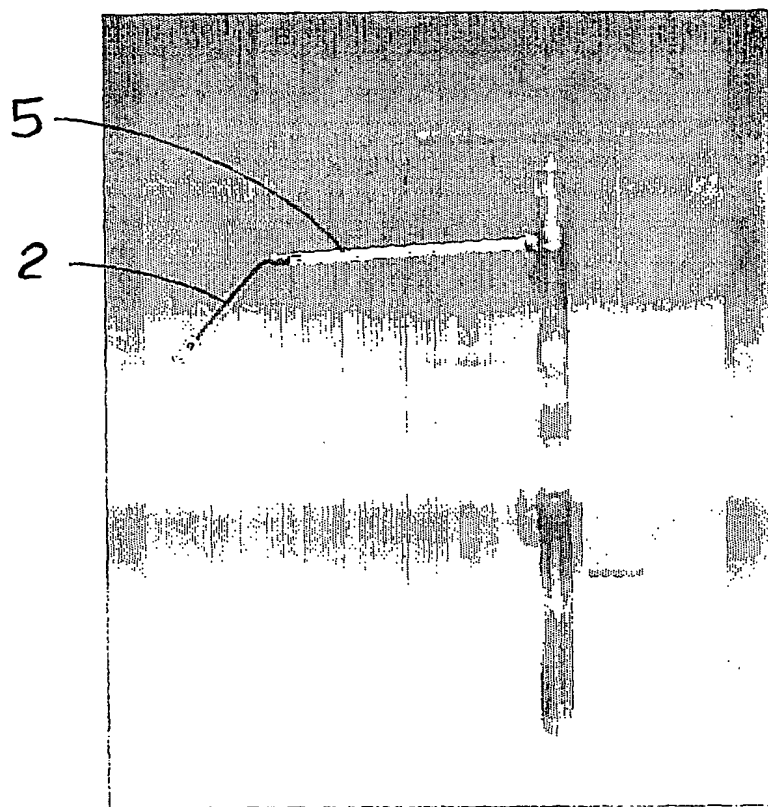


FIG. 2

3/3

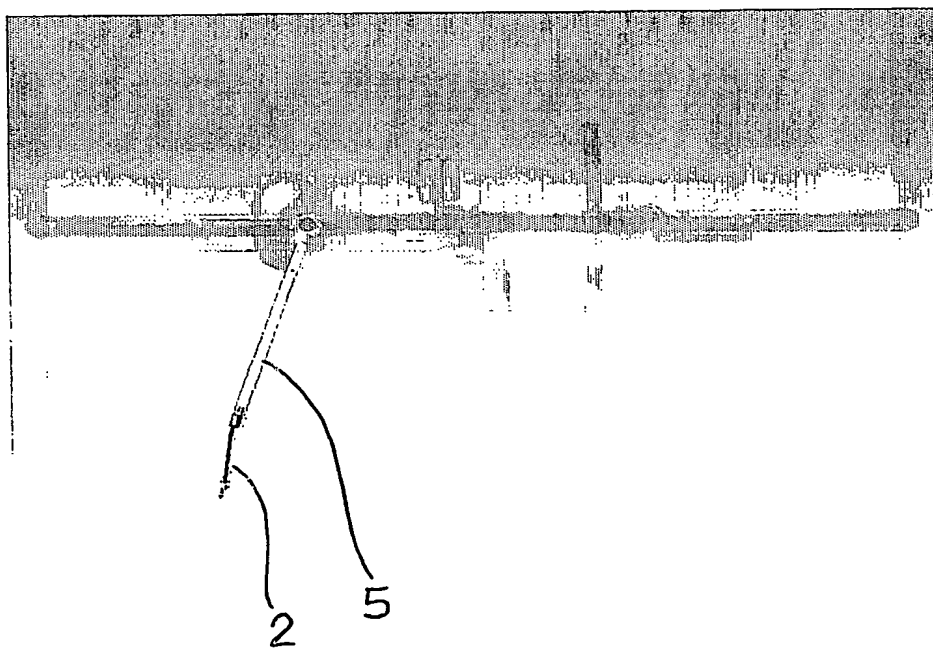


FIG. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IT 03/00229

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A01K27/00 A01K1/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 202 08 155 U (AUERBECK EDGAR) 17 October 2002 (2002-10-17) page 1, paragraphs 1-3; figure 1	1,2,5,8, 10
Y	----	3,4
X	FR 2 525 069 A (TEMPOREL RAYMOND) 21 October 1983 (1983-10-21) page 2, line 4-6,12-29 page 3, line 10-14 claims 1,2; figures 2,3	1
Y	----	7
Y	US 2001/037774 A1 (DE BIEN HUMBERTO) 8 November 2001 (2001-11-08) page 2, paragraphs 10,15,16 page 3, paragraphs 18,20,37 page 4, paragraphs 40-43 page 5, paragraphs 45-47; figures 5-8 ----- -/--	3,4

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

15 October 2003

Date of mailing of the international search report

23/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Been, M

# INTERNATIONAL SEARCH REPORT

Internat. Application No  
PCT/IT 03/00229

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>US 6 006 699 A (KEEVER JANET L)  28 December 1999 (1999-12-28)  column 5, line 30-48  column 5, line 62 -column 6, line 7  column 8, line 7-14; figures 3,5  -----</p>	7

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

Internatio pplication No  
PCT/IT 03/00229

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 20208155	U	17-10-2002	DE 20208155 U1	17-10-2002
FR 2525069	A	21-10-1983	FR 2525069 A3	21-10-1983
US 2001037774	A1	08-11-2001	US 6247427 B1	19-06-2001
			WO 02096193 A1	05-12-2002
			US 2003145801 A1	07-08-2003
US 6006699	A	28-12-1999	NONE	